



COQOS Micro SDK is a hypervisor-based platform for real-time safety-critical applications running on the next generation of microcontroller with hardware assisted virtualization. It allows running multiple virtual machines (VMs) with different ASIL levels on a single Microcontroller/μC with MPU (Memory Protection Unit) and provides freedom from interference between virtual machines.

Main Features


- Hardware assisted virtualization
- RTOS agnostic (e.g. AUTOSAR stacks from different vendors)
- Freedom from interference for virtual machines
- Static configuration
- Symmetric multi-processing for virtual machines
- Support for multi-core architectures
- VM update
- VM supervision and restart
- Support for error detection and notification
- Inter-VM communication
- Logging and tracing
- Integration with AUTOSAR methodology
- ISO 26262 ASIL-D compliant development

Target ECU/Application

- ADAS
- Power Train
- Motor & Chassis Control
- Braking system
- Gateway
- Body Control
- Energy Management
- Domain Controller

Benefits

- Supports consolidation of ECU running legacy single or multi-core applications
- Allows running applications of different ASIL levels in different VMs
- Allows integration of VMs from different vendors
- Lowers ASIL-D certification and recertification costs
- Supports design of secure system architectures by
 - isolation of faults
 - adding an additional layer of privilege above the OS
- Facilitates modular software updates

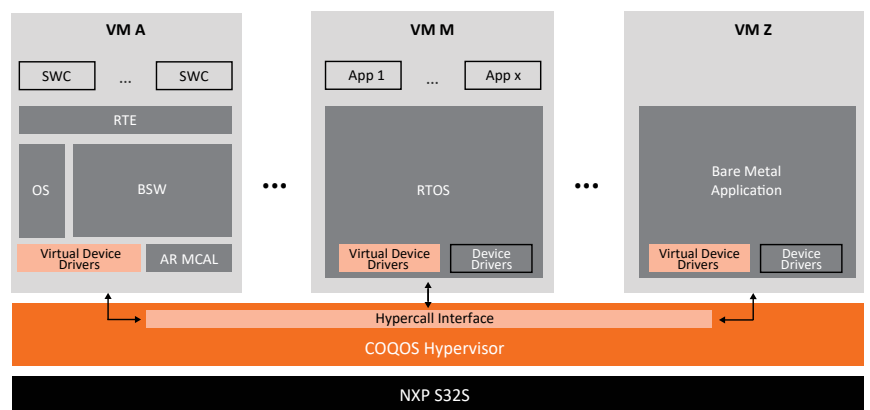

■ OpenSynergy (Core)
 ■ OpenSynergy (Optional)
 ■ Hardware Supplier
 ■ SW Supplier (Tier-1, OEM)

Supported Architectures

- Arm Cortex®-R52

Supported SoC

- **NXP S32 family** (OpenSynergy reference platform)

Supported Hardware upon Request

- STMicroelectronics Stellar family
- Infineon TriCore™
- Renesas RH850/U2x

Hypervisor

- Takes advantage of hardware assisted virtualization
- Especially tailored to the needs of automotive applications (e.g. AUTOSAR)
- Lean kernel, high efficiency and functional reliability
- Real-time scheduling with support of low latency interrupt
- Partitioning of processor resources (execution time and memory)
- Dedicated and controlled access to peripherals from the VMs
- Statically configured for high predictability

Inter-VM Communication

- Point-to-Point communication between VMs over channels
- Shared-memory as a medium for high-performance communication
- Static allocation of channels for controlled communication

Virtual Machines

- COQOS Micro SDK allows multiple virtual machines to

run on a single physical core

- COQOS Micro SDK allows a single virtual machine to run on one or more physical cores
- Each virtual machine has dedicated memory regions configured and managed by the hypervisor

Guest Operating Systems

Any RTOS that runs natively on the Microcontroller can run on the hypervisor.

COQOS Micro SDK supports:

- AUTOSAR (Classic Platform) systems
- non-AUTOSAR real-time operating systems
- bare-metal applications

Shared devices

- COQOS micro hypervisor sets the foundation for sharing devices between multiple VMs
- State-of-the-art, high-performance sharing techniques in both VM and hypervisor spaces
- Compatible with VIRTIO and AUTOSAR (MCAL) standards

AUTOSAR Integration

COQOS Micro SDK is compatible with the AUTOSAR methodology for seamless integration of AUTOSAR software.

Safety

COQOS Micro SDK is developed according to the ISO 26262 standard and can be used up to ASIL-D based applications.

Support

COQOS Micro SDK comes with standard support and access to updates of the product. In addition, OpenSynergy's Engineering Services are available to port COQOS Micro SDK to your hardware or to help in configuration or integration tasks.

Contact

OpenSynergy GmbH

Rotherstraße 20
D – 10245 Berlin
Germany

Phone: +49 30 6098 540 - 0

Fax: +49 30 6098 540 - 99

E-mail: sales@opensynergy.com

Web: www.opensynergy.com

OpenSynergy, Inc. (USA)

765 East 340 South
Suite 106
American Fork, UT 84003

Phone: +1 (801) 692 1653

E-mail: sales@opensynergy.com

Web: www.opensynergy.com



COQOS Micro SDK is a hypervisor-based platform for real-time safety-critical applications running on the next generation of microcontroller with hardware assisted virtualization. It allows running multiple virtual machines (VMs) with different ASIL levels on a single Microcontroller/μC with MPU (Memory Protection Unit) and provides freedom from interference between virtual machines.

Main Features


- Hardware assisted virtualization
- RTOS agnostic (e.g. AUTOSAR stacks from different vendors)
- Freedom from interference for virtual machines
- Static configuration
- Symmetric multi-processing for virtual machines
- Support for multi-core architectures
- VM update
- VM supervision and restart
- Support for error detection and notification
- Inter-VM communication
- Logging and tracing
- Integration with AUTOSAR methodology
- ISO 26262 ASIL-D compliant development

Target ECU/Application

- ADAS
- Power Train
- Motor & Chassis Control
- Braking system
- Gateway
- Body Control
- Energy Management
- Domain Controller

Benefits

- Supports consolidation of ECU running legacy single or multi-core applications
- Allows running applications of different ASIL levels in different VMs
- Allows integration of VMs from different vendors
- Lowers ASIL-D certification and recertification costs
- Supports design of secure system architectures by
 - isolation of faults
 - adding an additional layer of privilege above the OS
- Facilitates modular software updates

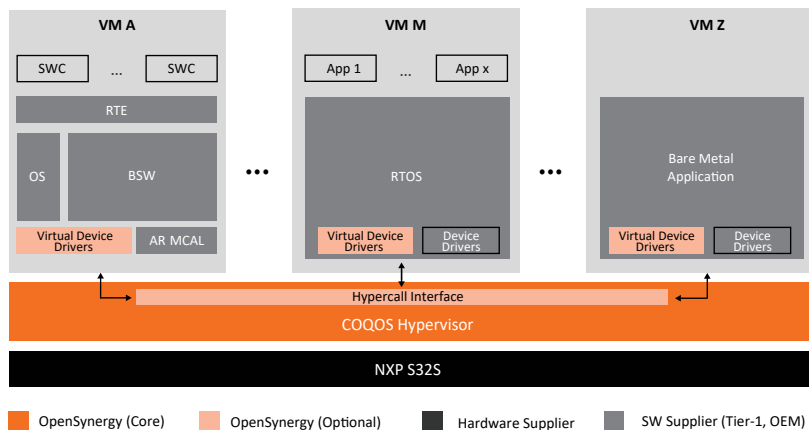

Supported Architectures

- Arm Cortex®-R52

Supported SoC

- **NXP S32 family** (OpenSynergy reference platform)

Supported Hardware upon Request

- STMicroelectronics Stellar family
- Infineon TriCore™
- Renesas RH850/U2x

Hypervisor

- Takes advantage of hardware assisted virtualization
- Especially tailored to the needs of automotive applications (e.g. AUTOSAR)
- Lean kernel, high efficiency and functional reliability
- Real-time scheduling with support of low latency interrupt
- Partitioning of processor resources (execution time and memory)
- Dedicated and controlled access to peripherals from the VMs
- Statically configured for high predictability

Inter-VM Communication

- Point-to-Point communication between VMs over channels
- Shared-memory as a medium for high-performance communication
- Static allocation of channels for controlled communication

Virtual Machines

- COQOS Micro SDK allows multiple virtual machines to run on a single physical core

- COQOS Micro SDK allows a single virtual machine to run on one or more physical cores
- Each virtual machine has dedicated memory regions configured and managed by the hypervisor

Guest Operating Systems

Any RTOS that runs natively on the Microcontroller can run on the hypervisor.

COQOS Micro SDK supports:

- AUTOSAR (Classic Platform) systems
- non-AUTOSAR real-time operating systems
- bare-metal applications

Shared devices

- COQOS micro hypervisor sets the foundation for sharing devices between multiple VMs
- State-of-the-art, high-performance sharing techniques in both VM and hypervisor spaces
- Compatible with VIRTIO and AUTOSAR (MCAL) standards

AUTOSAR Integration

COQOS Micro SDK is compatible with the AUTOSAR methodology for seamless integration of AUTOSAR software.

Safety

COQOS Micro SDK is developed according to the ISO 26262 standard and can be used up to ASIL-D based applications.

Support

COQOS Micro SDK comes with standard support and access to updates of the product. In addition, OpenSynergy’s Engineering Services are available to port COQOS Micro SDK to your hardware or to help in configuration or integration tasks.

Contact

OpenSynergy GmbH

Rotherstraße 20
D – 10245 Berlin
Germany

Phone: +49 30 6098 540 - 0
Fax: +49 30 6098 540 - 99
E-mail: sales@opensynergy.com
Web: www.opensynergy.com

OpenSynergy, Inc. (USA)

765 East 340 South
Suite 106
American Fork, UT 84003
Phone: +1 (801) 692 1653
E-mail: sales@opensynergy.com
Web: www.opensynergy.com



COQOS Micro SDK is a hypervisor-based platform for real-time safety-critical applications running on the next generation of microcontroller with hardware assisted virtualization. It allows running multiple virtual machines (VMs) with different ASIL levels on a single Microcontroller/μC with MPU (Memory Protection Unit) and provides freedom from interference between virtual machines.

Main Features


- Hardware assisted virtualization
- RTOS agnostic (e.g. AUTOSAR stacks from different vendors)
- Freedom from interference for virtual machines
- Static configuration
- Symmetric multi-processing for virtual machines
- Support for multi-core architectures
- VM update
- VM supervision and restart
- Support for error detection and notification
- Inter-VM communication
- Logging and tracing
- Integration with AUTOSAR methodology
- ISO 26262 ASIL-D compliant development

Target ECU/Application

- ADAS
- Power Train
- Motor & Chassis Control
- Braking system
- Gateway
- Body Control
- Energy Management
- Domain Controller

Benefits

- Supports consolidation of ECU running legacy single or multi-core applications
- Allows running applications of different ASIL levels in different VMs
- Allows integration of VMs from different vendors
- Lowers ASIL-D certification and recertification costs
- Supports design of secure system architectures by
 - isolation of faults
 - adding an additional layer of privilege above the OS
- Facilitates modular software updates

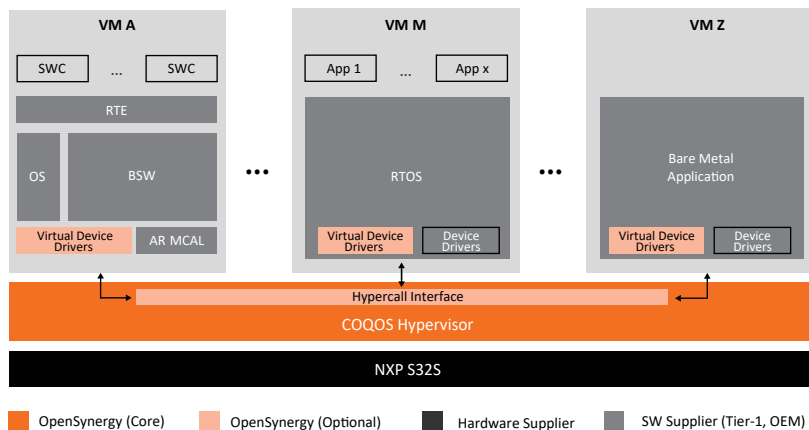

Supported Architectures

- Arm Cortex®-R52

Supported SoC

- **NXP S32 family** (OpenSynergy reference platform)

Supported Hardware upon Request

- STMicroelectronics Stellar family
- Infineon TriCore™
- Renesas RH850/U2x

Hypervisor

- Takes advantage of hardware assisted virtualization
- Especially tailored to the needs of automotive applications (e.g. AUTOSAR)
- Lean kernel, high efficiency and functional reliability
- Real-time scheduling with support of low latency interrupt
- Partitioning of processor resources (execution time and memory)
- Dedicated and controlled access to peripherals from the VMs
- Statically configured for high predictability

Inter-VM Communication

- Point-to-Point communication between VMs over channels
- Shared-memory as a medium for high-performance communication
- Static allocation of channels for controlled communication

Virtual Machines

- COQOS Micro SDK allows multiple virtual machines to run on a single physical core

- COQOS Micro SDK allows a single virtual machine to run on one or more physical cores
- Each virtual machine has dedicated memory regions configured and managed by the hypervisor

Guest Operating Systems

Any RTOS that runs natively on the Microcontroller can run on the hypervisor.

COQOS Micro SDK supports:

- AUTOSAR (Classic Platform) systems
- non-AUTOSAR real-time operating systems
- bare-metal applications

Shared devices

- COQOS micro hypervisor sets the foundation for sharing devices between multiple VMs
- State-of-the-art, high-performance sharing techniques in both VM and hypervisor spaces
- Compatible with VIRTIO and AUTOSAR (MCAL) standards

AUTOSAR Integration

COQOS Micro SDK is compatible with the AUTOSAR methodology for seamless integration of AUTOSAR software.

Safety

COQOS Micro SDK is developed according to the ISO 26262 standard and can be used up to ASIL-D based applications.

Support

COQOS Micro SDK comes with standard support and access to updates of the product. In addition, OpenSynergy’s Engineering Services are available to port COQOS Micro SDK to your hardware or to help in configuration or integration tasks.

Contact

OpenSynergy GmbH

Rotherstraße 20
D – 10245 Berlin
Germany

Phone: +49 30 6098 540 - 0
Fax: +49 30 6098 540 - 99
E-mail: sales@opensynergy.com
Web: www.opensynergy.com

OpenSynergy, Inc. (USA)

765 East 340 South
Suite 106
American Fork, UT 84003

Phone: +1 (801) 692 1653
E-mail: sales@opensynergy.com
Web: www.opensynergy.com